Asus X55C DDR3 SODIMM Memory Replacement

Asus X55C DDR3 SODIMM Memory Replacement

Written By: ZFix



INTRODUCTION

How to upgrade the Laptop memory.

______________ Video manual: ______________

[video: http://youtu.be/zRjcZQ59SSY]

TOOLS:

- Phillips #0 Screwdriver (1)

PARTS:

- DDR3 1333 SO-DIMM RAM (1)

Step 1 — HDD / RAM Cover

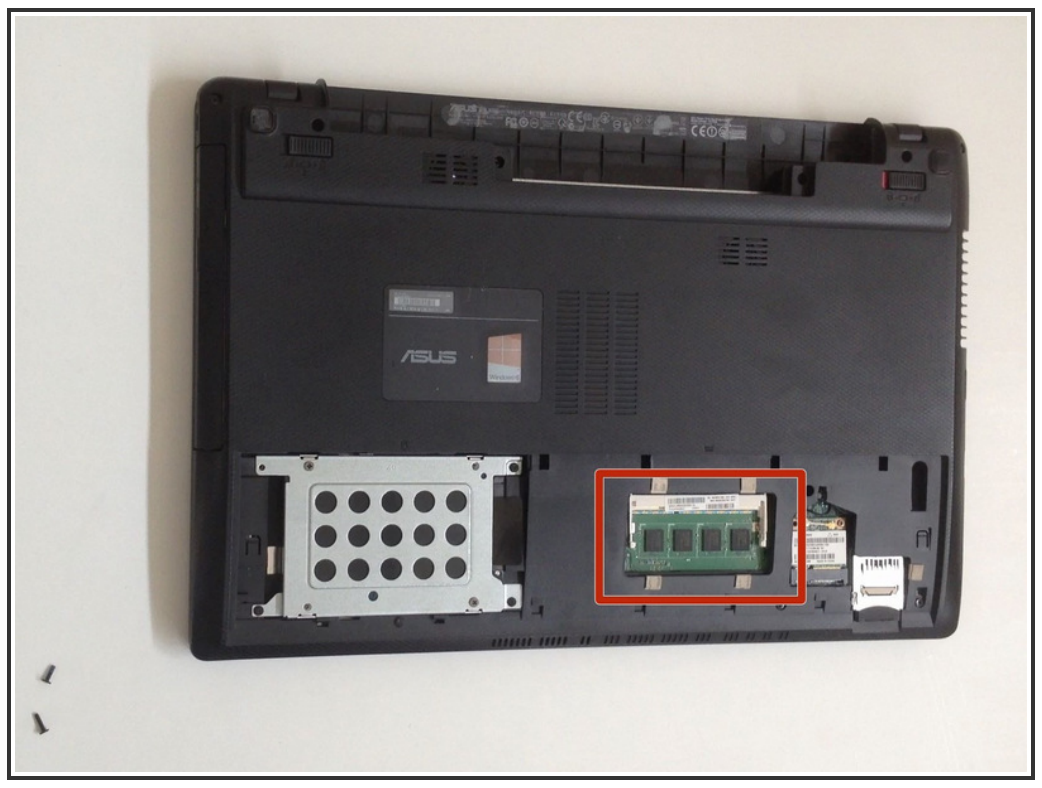
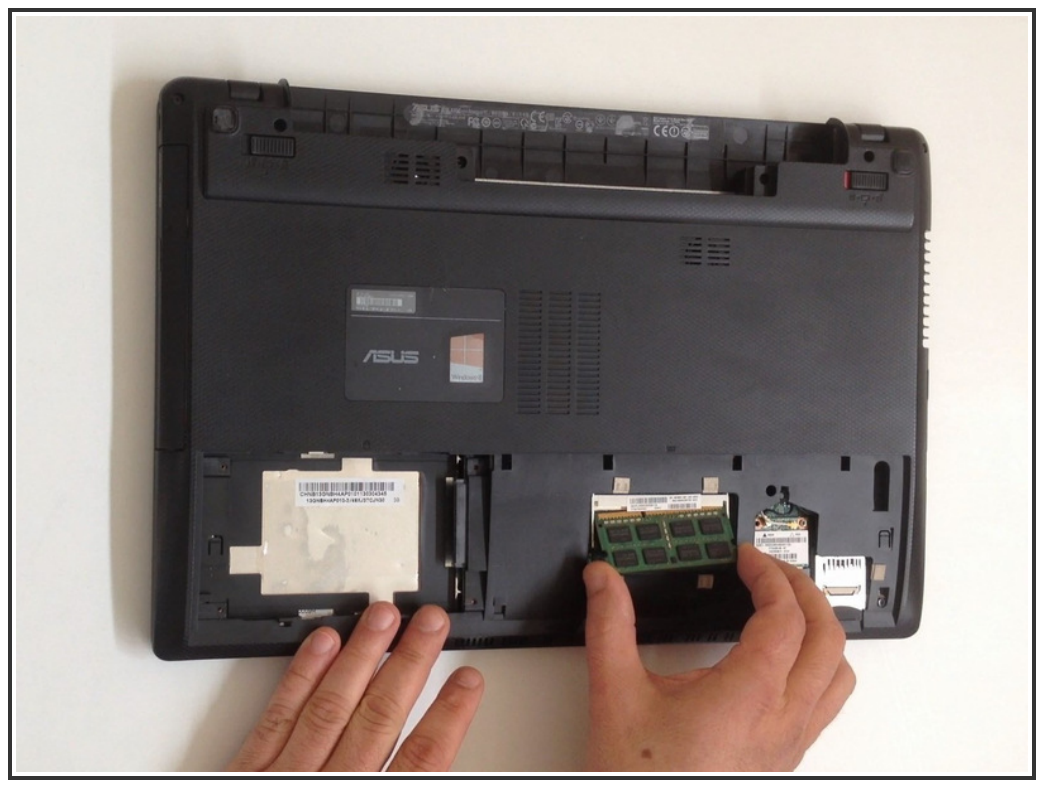






- Switch off the Laptop and remove the Battery.
- Remove two screws securing the HDD / RAM (service) cover.
- Remove the cover.

Step 2 — DDR3 SO-DIMM SDRAM


- This Laptop has 2 GB or 4 GB DDR3 1333/1600 MHz SDRAM OnBoard memory and 1 x SO-DIMM socket for expansion up to 6 GB or 8 GB SDRAM
- You can install only one DDR3 SDRAM Module, maximum 4 GB.
- .
- .
- .
- .
- **Did you do it successfully.**

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-17 05:39:40 PM.